


# Standard PV Module

Poly

# DHP72


## 325W-335W

Standard PV module is composed by a plurality of monocrystalline or polycrystalline cells in series (generally 60cells and 72 cells), combined with two layers of EVA ,glass, backsheet and frame. It has very stable power generation efficiency between 17% and 19%. Due to factors such as stability, safety, and excellent price, Standard PV modules are widely used in industrial and commercial roofs, ground power stations, household and poverty alleviation power stations.

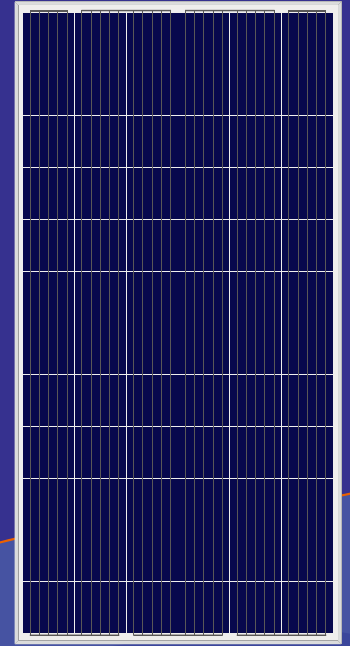

## QUALITY GUARANTEE

### LINEAR POWER OUTPUT GUARANTEE

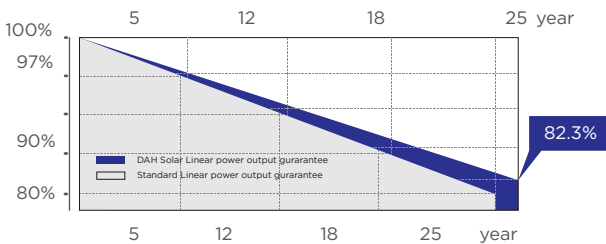






**10 years** 10-year material & technology warranty

**25 years** 25-year linear power output warranty

**0~+5W**  
Positive Tolerance

**17.25%**  
Max Module Eff.(%)

## PRODUCT PERFORMANCE ADVANTAGE

-  Select Grade A crystalline silicon solar cells, high-power output with cost-effective
-  Preferred packaging materials and strict process technology, excellent PID free performance
-  Certified by Dust-Sand,Salt-Mist, Ammonia etc. weather resistance tests, strong environmental adaptability
-  Highly transparent coated tempered glass to increase light absorption and reduce power loss
-  Optimized frame design to improve PV module load capacity and appearance protection



Top runner of smart solar system

**Factory Address:** No.358 Tianhe Road, Luyang Industrial Park, Hefei City, Anhui, China



**Office Address:** Floor 1-3, 6#A, Gongtuo Xinglu Industrial Park, Hefei City, Anhui, China

**Email:** sales@dh-solar.cn **Tel:** +86-0551-65655842

# Standard PV Module

## DHP72 325W-335W

### Design

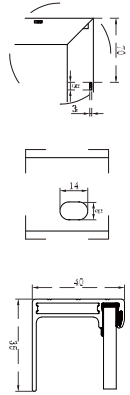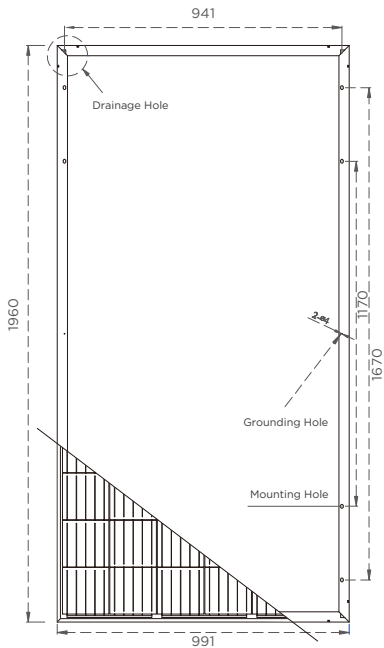

### Mechanical Specification

Cells Type	Poly 156.75×156.75mm
Weight	22.5kg
Dimension (L×W×T)	1960×991×40mm
Output Cables	TUV, Length 1100mm, 4.0mm <sup>2</sup>
No.of Cells	72 (6×12)
Glass	3.2mm High Transmission, Antireflection Coating
Connector	QC4 or MC4 Compatible
Packing	27pcs/pallet, 270pcs/20GP, 696pcs/40HQ

### Operating Parameters

Maximum system voltage	1000V/1500V DC
Operating Temperature	-40 ~ +85℃
Maximum series fuse rating	20A
Snow load, frontside	5400Pa
Wind load, backside	2400Pa
Nominal operating cell temperature	45℃±2℃
Application level	Class A

### Electrical Characteristics(STC)

Module Type	DHP72-325W	DHP72-330W	DHP72-335W
Maximum Power (Pmax)	325W	330W	335W
Open-circuit Voltage (Voc)	45.9V	46.1V	46.3V
Maximum Power Voltage (Vmp)	37.2V	37.3V	37.6V
Short-circuit Current (Isc)	9.20A	9.29A	9.39A
Maximum Power Current (Imp)	8.74A	8.85A	8.91A
Module Efficiency (%)	16.77%	17.02%	17.25%
Power Tolerance		0-+5W	
Temperature Coefficient of Isc		0.05%/℃	
Temperature Coefficient of Voc		-0.32%/℃	
Temperature Coefficient of Pmax		-0.41%/℃	
Standard Test Environment	Irradiance 1000w/m <sup>2</sup> , Cell temperature 25℃, Spectrum AM1.5		

### Electrical Characteristics(NOCT)

Module Type	DHP72-325W	DHP72-330W	DHP72-335W
Maximum Power (Pmax)	242W	246W	249W
Open-circuit Voltage (Voc)	42.6V	42.7V	42.9V
Maximum Power Voltage (Vmp)	34.5V	34.6V	34.9V
Short-circuit Current (Isc)	7.47A	7.57A	7.58A
Maximum Power Current (Imp)	7.02A	7.11A	7.14A
Standard Test Environment	Irradiance 800w/m <sup>2</sup> , Cell temperature 20℃, Spectrum AM1.5, Wind speed 1m/s		